

(12) PATENT  
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 200020827 B2  
(10) Patent No. 728019

(54) Title  
Internal-combustion engine

(51)<sup>6</sup> International Patent Classification(s)  
F01B 001/12 F02B 057/04  
F01B 009/02 F02B 075/26  
F01B 013/04 F02B 075/32

(21) Application No: 200020827

(22) Application Date: 2000 .03 .10

(30) Priority Data

(31) Number (32) Date  
88103685 1999 .03 .10

(33) Country  
TW

(43) Publication Date : 2000 .09 .14

(43) Publication Journal Date : 2000 .09 .14

(44) Accepted Journal Date : 2001 .01 .04

(71) Applicant(s)  
Shih-Pin Huang


(72) Inventor(s)  
Shih-Pin Huang

(74) Agent/Attorney  
DAVIES COLLISON CAVE,1 Little Collins Street,MELBOURNE VIC 3000

(56) Related Art  
US 5967102  
US 4166438  
US 5123394

# ABSTRACT

An internal combustion engine comprises multiple cylinder blocks (20) in series rotatably mounted in a single casing. The cylinder blocks (20) each define multiple cylinders (22) along a circumferential portion of the cylinder block (20) to receive a piston (220) in each one. The casing (10) forms multiple spark plug holes and defines multiple exhaust ports (16) and multiple intake ports (14) in the periphery thereof. Each of the cylinders (22) is accessible to the spark plugs (12), the exhaust ports (16) and the intake ports (14) upon rotation of the cylinder block (20). The spark plugs (12), the exhaust ports (16) and the intake ports (14) of various cylinder blocks (20) are staggered.



**AUSTRALIA**  
**PATENTS ACT 1990**  
**COMPLETE SPECIFICATION**

**NAME OF APPLICANT(S):**

**Shih-Pin Huang**

**ADDRESS FOR SERVICE:**

**DAVIES COLLISON CAVE**  
Patent Attorneys  
1 Little Collins Street, Melbourne, 3000.

**INVENTION TITLE:**

**Internal-combustion engine**

**The following statement is a full description of this invention, including the best method of performing it known to me/us:-**

---

- 1A -

1. **Field of the Invention**

The present invention relates to an internal-combustion engine, and more particularly to an efficient internal-combustion engine comprising multiple cylinder block in series mounted in a single casing, wherein each of the cylinder block comprises multiple  
5 cylinders that drive the cylinder block to rotate integrally therewith.

2. **Description of Related Art**

An internal combustion engine is a commonly used machine that converts the energy store in some fuel into motion. All internal combustion engines use a "fixed-  
10 cylinder" configuration. A piston in a cylinder and a connecting rod between the piston and the main engine shaft convert the expanding gases in burning fuel from reciprocating linear motion initiated in the piston to rotary movement of the main engine shaft thereby supplying energy in the form of a rotating shaft at the output of the engine. However, this type of internal combustion engine is inefficient. High-power output requires a large  
15 cylinder with many ancillary devices, such as a radiator, fuel pump, carburettor and so on. Thus, fabrication cost and maintenance cost will be high.

An internal combustion engine with rotary cylinders in accordance with the present invention tends to mitigate and/or obviate the aforementioned problems.

20 3. **Summary of the Invention**

The main object of the present invention is to provide an internal combustion engine comprised of multiple cylinder blocks in series mounted a single casing, with the advantage of space and/or weight reduction and efficient power and/or performance improvement.

25 According to the present invention there is provided an internal combustion engine comprising:

- a casing having multiple spark plugs located on the periphery thereof, and multiple exhaust ports and intake ports defined in the periphery thereof;
- a shaft centrally provided in the casing;
- multiple gears fixed on the shaft;
- multiple cylinder blocks rotatably provided in series in said casing and each



corresponding to one of the gears respectively, each cylinder block having multiple cylinders defined along a circumferential portion of the cylinder block to respectively receive a piston therein, each of the cylinders being accessible to one of the spark plugs, the exhaust ports or the intake ports upon rotation of the cylinder clock, wherein the piston is pivotally attached to a connecting rod which is pivotally connected to a pinion which in turn meshes with one of the corresponding gears; and

an output shaft integrally formed on the end of the cylinder block;

wherein the connecting rod is eccentrically connected to the pinion, and the pinion is fixed on the cylinder block by a shaft;

wherein each of the cylinder blocks comprises four cylinders and the casing provides two spark plugs, two exhaust ports and two intake ports to each of the cylinder blocks;

wherein the cylinder blocks are located in a staggered manner;

wherein the centerlines of the cylinders are non-radial to the centerline of the casing;

whereby, each piston sequentially reciprocates through a power stroke, an exhaust stroke, an intake stroke and a compression stroke to rotate the pinion by the connecting rod, whereby the rotation of the pinion causes the cylinder blocks to rotate with respect to the gears to supply a rotational power output through the output shaft.



Other objects, advantages and novel features of the invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings.

In the drawings

5 Fig. 1 is a cross-sectional view of a cylinder block of the present invention;

Fig. 2 is a cross-sectional view of the cylinder block of Fig. 1 rotated 45°;

Fig. 3 is an exploded view of a piston, a pinion and a gear of the present invention;

10 Fig. 4 is a longitudinal-sectional view of the present invention while taking the line 4-4 of Fig. 1;

Fig. 5 is a perspective view in partial section of a preferred embodiment of the present invention; and

Fig. 6 is a perspective view in partial section of another preferred embodiment of the invention.

15 Referring to Figs. 1 and 4, an internal combustion engine in accordance with the present invention is a four-stroke engine. The engine is comprised of multiple cylinder blocks (20) in series connected with the main shaft (30) in a circular casing (10). Spark plugs (12) are evenly distributed on the outside of the casing (10). Intake ports (14) and exhaust ports (16) are also defined in the casing  
20 (10). The number of spark plugs (12), intake ports (14) and exhaust ports (16) is the same.

Each cylinder block (20), which is rotatably fitted in the casing (10), has multiple cylinders (22) and pistons (220) movably received in the cylinders (22) (the figures show 4 cylinders and 4 pistons). The number of pistons (220) is twice

the quantity of either the spark plugs (12), intake ports (12) or exhaust ports (14).

Namely, there are two spark plugs, two intake ports and two exhaust ports in this embodiment and the angle distance between two similar elements (spark plugs, intake ports or exhaust ports) is 180°. The centerlines of the cylinders (22) are

5 respectively perpendicular to the diameter of the casing (10). A connecting rod (222) is eccentrically pivotally mounted on a pinion (224), and the end of the connecting rod (222) is pivotally connected to the piston (220). The pinion (224) is rotatably attached to the cylinder block (20) by a shaft (226). A main gear (32) is stably mounted on the main shaft (30) by a key (34) to engage each pinion (224).

10 An output shaft (24) is formed on the cylinder block (20) at end.

As shown in Fig. 1; all the pistons (220) move synchronously and arrive at the top of the cylinders (22) at the same time. The upper and lower cylinders (22) are vertical, and their associated pistons (220) installed therein are aligned with the spark plugs (12) and are ready for a power stroke. For the sake of simplicity, the  
 15 upper and lower cylinder and piston combinations will be identified as "cylinder unit 1". The left and right cylinders (22) are horizontal and their associated pistons (220) installed therein have substantially completed an exhaust stroke and are ready for an intake stroke. Again for the sake of simplicity, these two cylinder and piston combinations will be identified as "cylinder unit 2". When the spark plugs  
 20 (12) ignites the air-fuel mixture in the cylinders (22) above the pistons (220) in cylinder unit 1, the pistons (220) are pushed inwards to rotate the cylinder block (20) clockwise.

Referring to Fig. 2, the cylinder block (20) has been rotated clockwise 45°. The pistons (220) of cylinder unit 1 have completed a power stroke and are ready

for an exhaust stroke; the pistons (220) of cylinder unit 2 have completed an intake stroke and are ready for a compression stroke. Again, all pistons (220) simultaneously arrive at the bottom of the stroke.

The cylinder block (20) continues to rotate due to inertia and/or the driving  
5 force from other cylinder blocks, and all pistons (220) are pushed outwards. After having rotated another 45°, the cylinder block (20) arrives at a position such that cylinder unit 2 is in the same position as cylinder unit 1 shown in Fig.1. Now cylinder unit 2 having completed a compression stroke is ready for a power stroke, and cylinder unit 1 having completed an exhaust stroke is ready for an intake  
10 stroke. The spark plugs ignite the air-fuel mixture again to repeat the process described above.

Because each cylinder (22) completes one stroke for each 45° the cylinder block rotates, each cylinder (22) will complete an entire four-stroke-cycle, namely, intake, compression, power and exhaust stroke, for every 180° that the cylinder  
15 block (20) rotates. Moreover, for every 90° that the cylinder block (20) rotates, two cylinders (22) complete a power stroke to supply energy. Thereby, the cylinder block (20) rotates continuously.

Referring to Fig. 3, the piston (220) and the connecting rod (222) are similar to the conventional elements. It is noted that the connecting rod (222) is  
20 eccentrically mounted on the pinion (224) to convert the reciprocating linear motion to rotary motion. Notches (228) are defined in the pinion (224) to offset the weight of the pinion connecting post (unnumbered) and balance the pinion (224) so it will run smoothly.



According to the present invention, the internal combustion engine comprises multiple cylinder blocks (20) in series mounted in the casing (10), as shown in Fig. 4. As shown in Fig. 5, the spark plugs (12), intake ports (14) and exhaust ports (16) of adjacent cylinder blocks (20) are staggered by 45°.

5 Alternatively, it is allowable to stagger the cylinder blocks (22) to align the spark plugs (12), the intake ports (14) and the exhaust ports (16).

As shown in Fig. 6, the spark plugs (12) are in linear arrangement, which facilitates the arrangement of the cooling system of the engine to be located in one place rather than all around the casing (10). Furthermore, from this preferred  
 10 embodiment as shown, it is to be noted that four sets of cylinder blocks are arranged in the casing (10), each being located at a position with 22.5 degree difference so as that, in terms of power output, there is always power generated at every point in the operation of the engine of the invention. With such an arrangement, the power output will be much smoother than a conventional  
 15 structure.

Table 1 shows piston operating sequence for the engine. For purposes of illustration, the cylinder block (20) in Fig. 1 defines the original position (0°) of cylinder block 1. In this state, cylinder unit 1 of cylinder block 1 is ready for a power stroke, and cylinder unit 2 is ready for an intake stroke. When cylinder  
 20 block 1 rotates from 0° to 45°, cylinder unit 1 and cylinder unit 2 have respectively completed the power stroke and the intake stroke, so "power/intake" is indicated in the block. Cylinder blocks 2, 3 and 4 are progressively later than cylinder block 1 by one stroke each, so that "compression/exhaust", "intake/power", and "exhaust/compression" are indicated in the corresponding blocks. Cylinder unit 1

of cylinder block 2 and cylinder unit 2 of cylinder block 4 are ready for a compression stroke that will consume energy. At the same time, cylinder unit 1 of the cylinder block 1 and cylinder unit 2 of cylinder block 3 are ready for a power stroke that will generate energy. Thus, the required energy of the compression stroke of cylinder blocks 2 and 4 can be provided by the power stroke of cylinder blocks 1 and 3. As shown in table 1, in an entire cycle, energy consumed by the compression stroke is provided by other cylinder blocks that have completed a power stroke. The engine does not need a flywheel to store energy for the compression stroke, so volume and weight of the engine can be reduced dramatically and the engine runs more smoothly.

	Number of row of the cylinders					
Number of cylinders in each row	1	2	3	4	5	6
4	90 (2)	45	30	22.5	18	15
6	60 (3)	30	20	15	12	10
8	45 (4)	22.5	15	11.25	9	7.5
10	36 (5)	18	12	9	7.2	6
12	30 (6)	15	10	7.5	6	5
18	20 (9)	10		5	4	
20	18 (10)	9	6	4.5	3.6	3

Taking the engine having four rows and each row being provided with four cylinders for example:

5 Each row is spaced apart from each other by 22.5 degree (as shown in the attached drawing), such that the power from the power stroke is able to be transmitted much more smoother than the engine having three rows, two rows and one row of cylinders. It should also be noted that the number in the parenthesis stands for the power stroke. Therefore, when taking one row four cylinder engine  
 10 for example, there are two power strokes simultaneously, which is one more than a conventional engine, such that the power output is greater and smoother.

Further, the connection between the piston (220) and the pinion (224) enables the cylinder block of the engine to rotate around the main gear (32) which is securely fixed (already described in detail in the original specification as filed).  
 15 Thus, because the rotation of the cylinder block around the main gear, the flywheel is no longer needed to store energy for the next stroke.

Table 2 depicts the engine's energy state. In cylinder block 1, cylinder unit  
 1's operating sequence is "power-exhaust-intake-compression", and cylinder unit  
 20 2's simultaneous operating sequence is later than unit 1 by two strokes and is "intake-compression-power-exhaust". To overlay the two units, the total energy output is positive in the rotational sectors 0°-45°, 90°-135°, 180°-225° and 270°-315°, and is negative in the rotational sectors 45°-90°, 135°-180°, 225°-270° and 315°-360°. In cylinder block 2, cylinder unit 1's simultaneous operating sequence

is later than cylinder unit 1 of cylinder block 1 by one stroke and is "compression-power-exhaust-intake", and cylinder unit 2's simultaneous operating sequence is "exhaust-intake-compression-power". To overlay the two units, the total energy output is positive in the rotational sectors 45°-90°, 135°-180°, 225°-270°, 315°-360°, and is negative in the rotational sectors 0°-45°, 90°-135°, 180°-225°, 270°-315°. Because the energy output of the two cylinder blocks (20) is complementary, the overall energy output of the cylinder blocks 1 and 2 is always positive. Cylinder blocks 3 and 4 operate in a similar manner to cylinder blocks 1 and 2, and the energy output of cylinder blocks 3 and 4 is also always positive. The combined energy output all these cylinder blocks 1, 2, 3, and 4 operating simultaneously is continuous and smooth without undulation.

The advantages of the present invention are:

1. The internal combustion engine does not need a flywheel, thereby greatly reducing volume and weight of the engine,
2. The internal combustion engine in accordance with the present invention is simpler and more efficient, so the fabrication cost and maintenance cost are less expensive.
3. More cylinder blocks can be freely added to the internal combustion engine in accordance with the present invention to attain the required power.

It is further known that Table 1 shows the piston operating sequence for the engine. The cylinder block (20) in Fig. 1 defines the original position (0°) of cylinder block 1. In this state, cylinder unit 1 of cylinder block 1 is ready for a power stroke, and cylinder unit 2 is ready for an intake stroke. When cylinder block 1 rotates from 0° to 45°, cylinder unit 1 and cylinder unit 2 have respectively

completed the power stroke and the intake stroke, so "power/intake" is indicated in the block. Cylinder blocks 2, 3 and 4 are progressively later than cylinder block 1 by one stroke each, so that "compression/exhaust", "intake/power", and "exhaust/compression" are indicated in the corresponding blocks. Cylinder unit 1

5 of cylinder block 2 and cylinder unit 2 of cylinder block 4 are ready for a compression stroke that will consume energy. At the same time, cylinder unit 1 of cylinder block 1 and cylinder unit 2 of cylinder block 3 are ready for a power stroke that will generate energy. Thus, the required energy of the compression stroke of cylinder blocks 2 and 4 can be provided by the power stroke of cylinder  
10 blocks 1 and 3. As shown in table 1, in an entire cycle, energy consumed by the compression stroke is provided by other cylinder blocks that have completed a power stroke. The engine does not need a flywheel to store energy for the compression stroke, so the overall volume and weight of the engine can be reduced dramatically and the engine runs more smoothly.

15 Furthermore, because the power transmission uses connecting rod (222) which are eccentrically and pivotally connected to a pinion (224) and the pinion (224) is mated to a main gear (32), the power generated by the power stroke from the piston will be transmitted to the main gear (32) by means of the connecting rod and the pinion. No flywheel is necessary to offset the power necessary to drive the  
20 motion of other pistons and no crank shaft is necessary to output the power due to the provision of the main shaft

Even though numerous characteristics and advantages of the present invention have been set forth in the foregoing description, together with details of the structure and function of the invention, the disclosure is illustrative only, and

changes may be made in detail, especially in matters of shape, size, and arrangement of parts within the principles of the invention to the full extent indicated by the broad general meaning of the terms in which the appended claims are expressed.

5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000


TABLE 1 CYLINDRICAL BLOCKS' OPERATING SEQUENCE

	Cylindrical block 1	Cylindrical block 2	Cylindrical block 3	Cylindrical block 4
0-45°	Power/Intake	Compression/ Exhaust	Intake/Power	Exhaust/Com- pression
45-90°	Exhaust/Com- pression	Power/Intake	Compression/ Exhaust	Intake/Power
90-135°	Intake/Power	Exhaust/Com- pression	Power/Intake	Compression/ Exhaust
135- 180°	Compression/ Exhaust	Intake/Power	Exhaust/Com- pression	Power/Intake
180- 225°	Power/Intake	Compression/ Exhaust	Intake/Power	Exhaust/Com- pression
225- 270°	Exhaust/Com- pression	Power/Intake	Compression/ Exhaust	Intake/Power
270- 315°	Intake/Power	Exhaust/Com- pression	Power/Intake	Compression/ Exhaust
315- 360°	Compression/ Exhaust	Intake/Power	Exhaust/Com- pression	Power/Intake


TABLE 2: Energy Output of Cylindrical Blocks

Energy Output of the Cylinder Units of the Cylindrical Block 1


5 Cylinder unit 1:

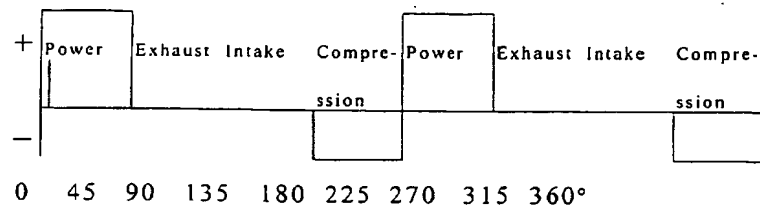

10 Cylinder unit 2:

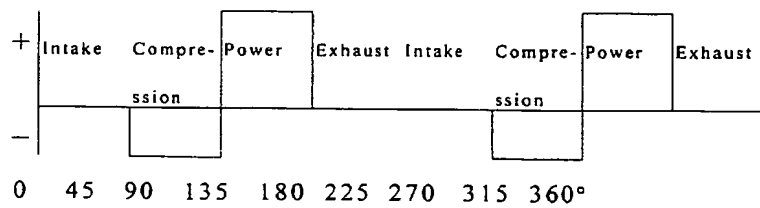


Total Energy output of the cylindrical block 1

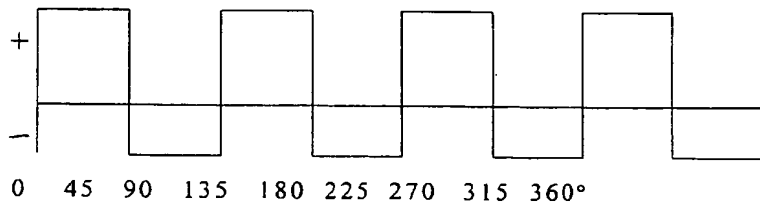




## ENERGY OUTPUT OF CYLINDRICAL BLOCK 2


Cylinder unit 1:

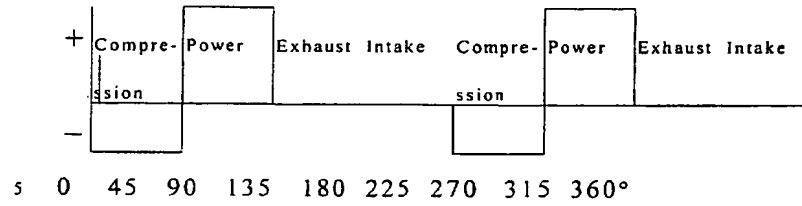

Cylinder unit 2:

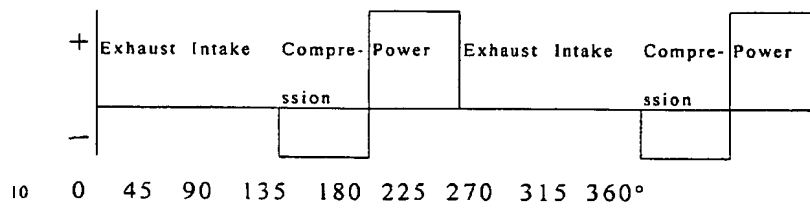


Total Energy output of the cylindrical block 2

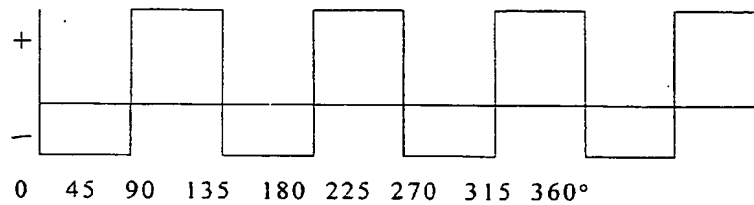


## ENERGY OUTPUT OF CYLINDRICAL BLOCK 3


Cylinder unit 1:

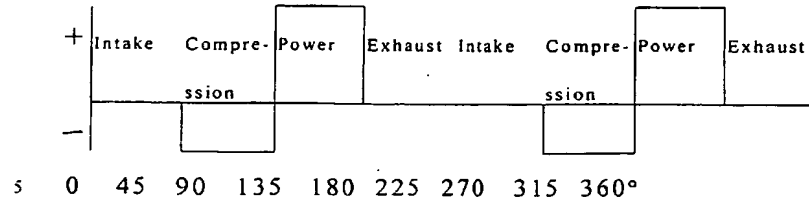

Cylinder unit 2:

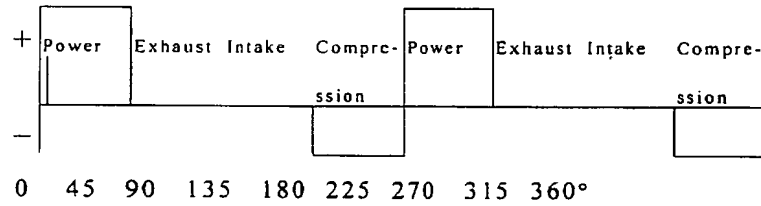


Total Energy output of the cylindrical block 3

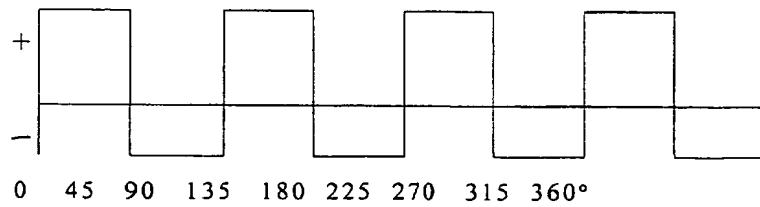


# ENERGY OUTPUT OF CYLINDRICAL BLOCK 4


Cylinder unit 1:

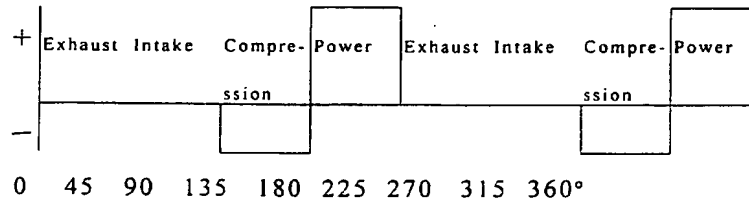


Cylinder unit 2:

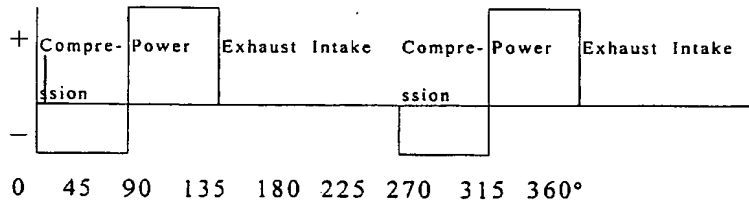

Total Energy output of the cylindrical block 4

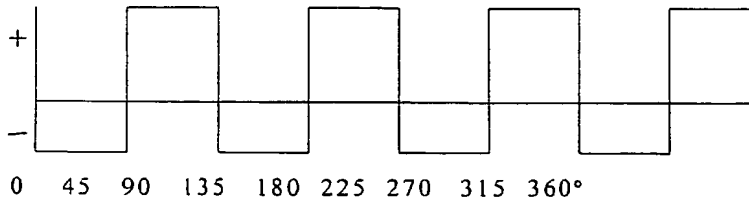


**TOTAL ENERGY OUTPUT OF CYLINDRICAL  
BLOCKS 1 AND 2**

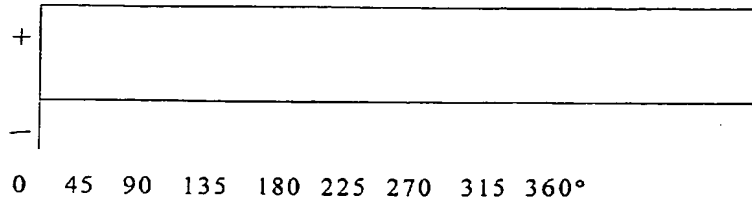


5

Total energy output of the cylindrical blocks 3 and 4

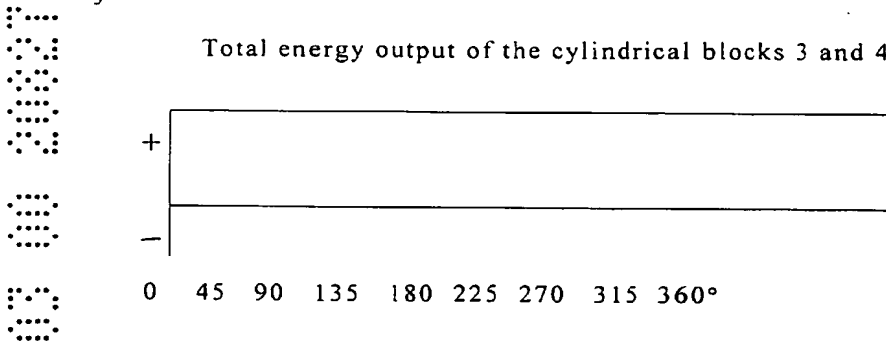

10

Total energy output of the cylindrical blocks 1,2,3 and 4

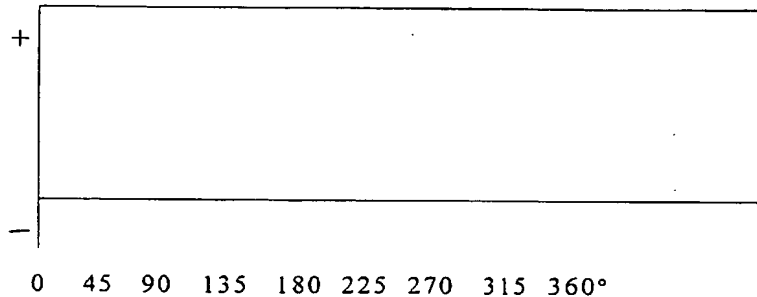

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

I. An internal combustion engine comprising:

a casing having multiple spark plugs located on the periphery thereof, and multiple exhaust ports and intake ports defined in the periphery thereof;

5 a shaft centrally provided in the casing;

multiple gears fixed on the shaft;

multiple cylinder blocks rotatably provided in series in said casing and each corresponding to one of the gears respectively, each cylinder block having multiple

10 cylinders defined along a circumferential portion of the cylinder block to respectively receive a piston therein, each of the cylinders being accessible to one of the spark plugs, the exhaust ports or the intake ports upon rotation of the

cylinder block, wherein the piston is pivotally attached to a connecting rod which is pivotally connected to a pinion which in turn meshes with one of the

corresponding gears; and

15 an output shaft integrally formed on the end of the cylinder block;

wherein the connecting rod is eccentrically connected to the pinion, and the pinion is fixed on the cylinder block by a shaft;

wherein each of the cylinder blocks comprises four cylinders and the casing provides two spark plugs, two exhaust ports and two intake ports to each of the

20 cylinder blocks;

wherein the cylinder blocks are located in a staggered manner;

wherein the centerlines of the cylinders are non-radial to the centerline of the casing;

- 18 -

whereby, each piston sequentially reciprocates through a power stroke, an exhaust stroke, an intake stroke and a compression stroke to rotate the pinion by the connecting rod, whereby the rotation of the pinion causes the cylinder blocks to rotate with respect to the gears to supply a rotational power output through the output shaft.

5

2. The internal-combustion engine as claimed in claim 1, wherein the spark plugs are linearly arranged on the casing.

3. An internal-combustion engine substantially as hereinbefore described with  
10 reference to the drawings and/or Examples.

15

DATED this 19th day of October, 2000

SHIH-PIN HUANG

20 By his Patent Attorneys

DAVIES COLLISON CAVE



FIG. 1

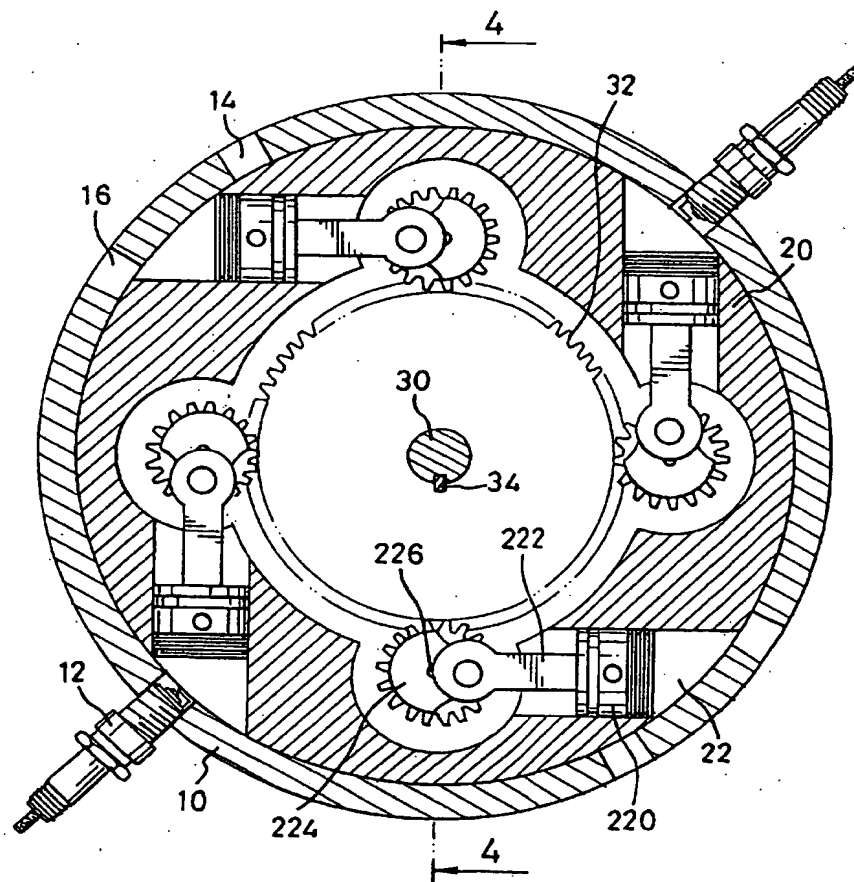


FIG. 1

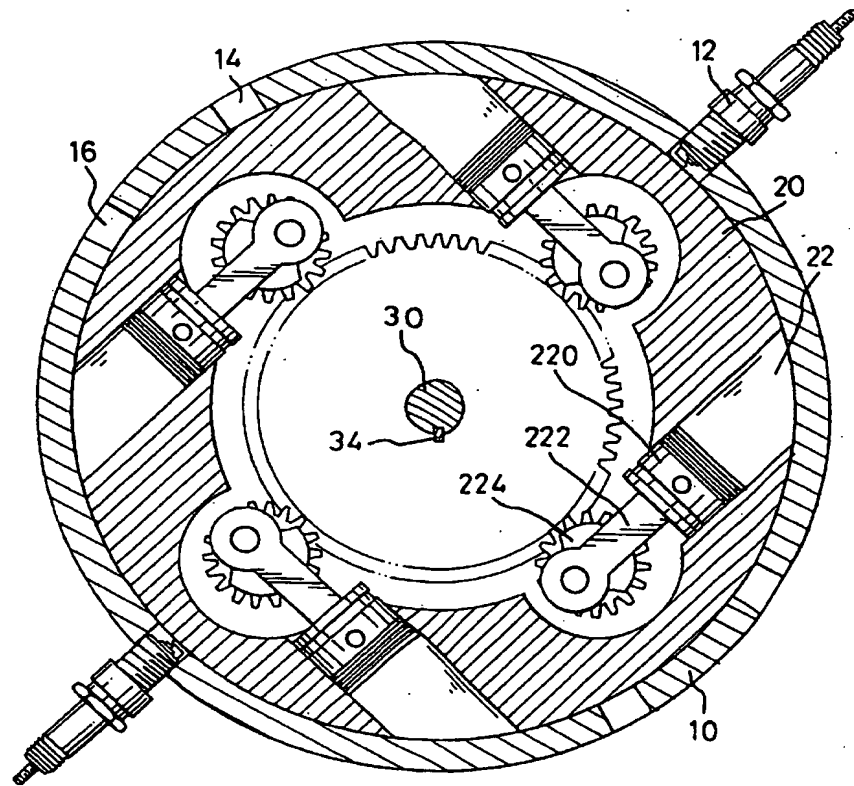


FIG. 2



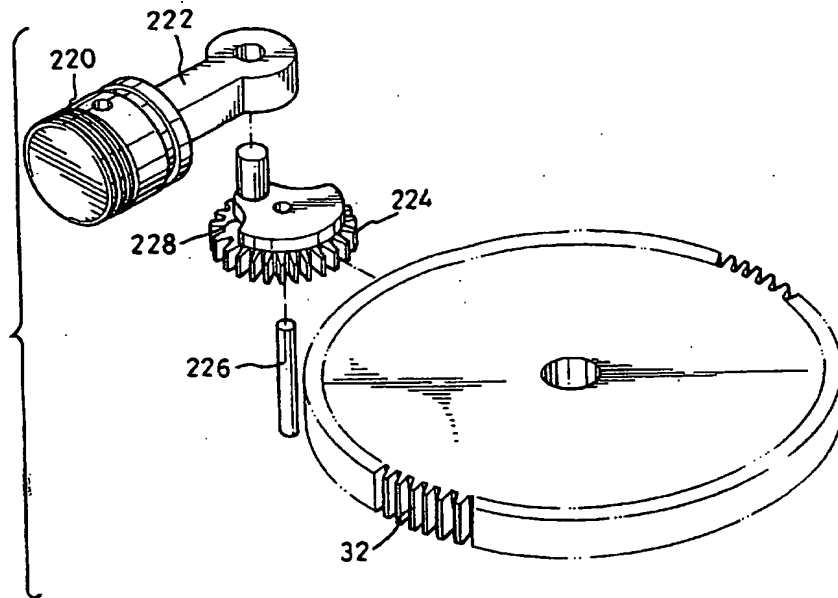


FIG. 3

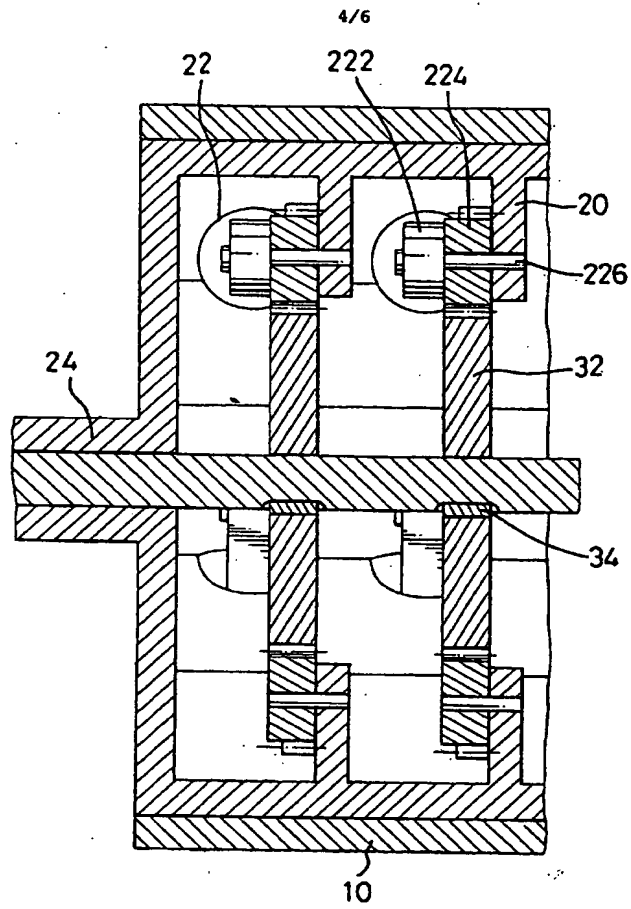


FIG. 4

10 03 00 2003

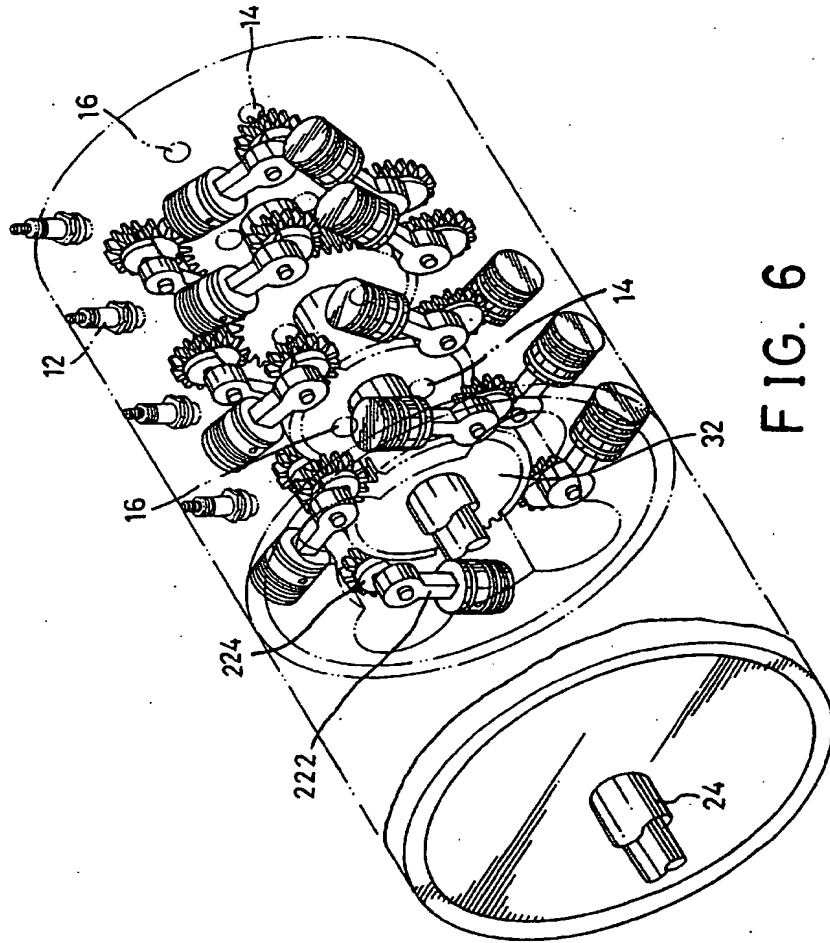


FIG. 6